


PULSE XL 15.25



Plenty of clean, deep bass from this heavy-duty 15-inch driver, along with a defined midrange and the smooth treble response that comes with a felt dust dome. With a solid 700W of power handling, the PULSE XL 15.25 delivers an authoritative performance packed with sweet harmonic overtones.

Frequency response

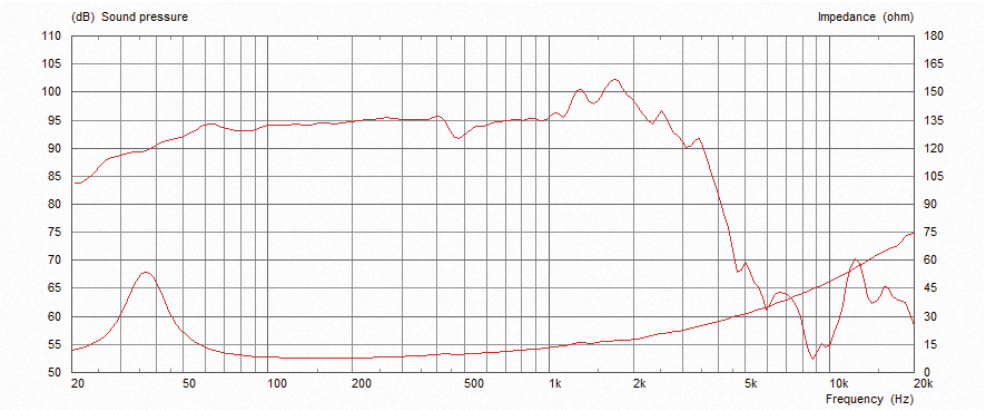

General Specifications

| | |
|-------------------------|---------------------------|
| Nominal Diameter | 381mm / 15in |
| Power Rating | 700W |
| Rated impedance | 8 Ω |
| Sensitivity | 97dB |
| Magnet type | Ferrite |
| Voice coil diameter | 63.5mm / 2.5in |
| Voice coil material | Copper |
| Former material | Polyimide |
| Cone material | Cellulose |
| Surround material | Triple roll, cloth sealed |
| Frequency range | 35-2100Hz |
| Xmax | 8mm / 0.31in |
| Gap height (Hg) | 8mm / 0.3in |
| VC winding height (Hvc) | 20mm / 0.8in |

Mounting Information

| | |
|-----------------------------|-----------------|
| Cut-out diameter | 353mm / 13.9in |
| Diameter | 385mm / 15.15in |
| Mounting hole dimensions | 6.4mm / 0.25in |
| Mounting hole PCD | 370mm / 14.5in |
| Number of mounting holes | 8 |
| Chassis depth (inc gasket) | 116.3mm |
| Magnet depth | 13.74in |
| Overall depth | 168mm / 6.6in |
| Unit weight | 5.4kg / 12lb |

Parameters

| | |
|--------------|----------------------|
| Sd | 855.3cm2 / 132.57in2 |
| Fs | 33.1Hz |
| Mms | 85.78g |
| Qms | 4.232 |
| Qes | 0.525 |
| Qts | 0.604 |
| Re | 666 Ω |
| Vas | 213.9l / 7.6ft3 |
| Bi | 13.88Tm |
| Cms | 0.21mm/N |
| Rms | 4.22kg/s |
| Le (at 1kHz) | 1.32mH |
| Xmax | 8mm / 0.31in |