


VT-Junior



Loaded into many popular branded practice combos the VT Jr is now available to buy for replacement and upgrades. Delivering the same balance and musicality as its big brother the V-Type, the 10-inch VT Jr. has been formulated using the same recipe of old and new design techniques. Expect a juicy low mid punch together with plenty of high end sparkle and the same thrilling responsiveness that will leave you feeling connected to your music.

8 Frequency Response

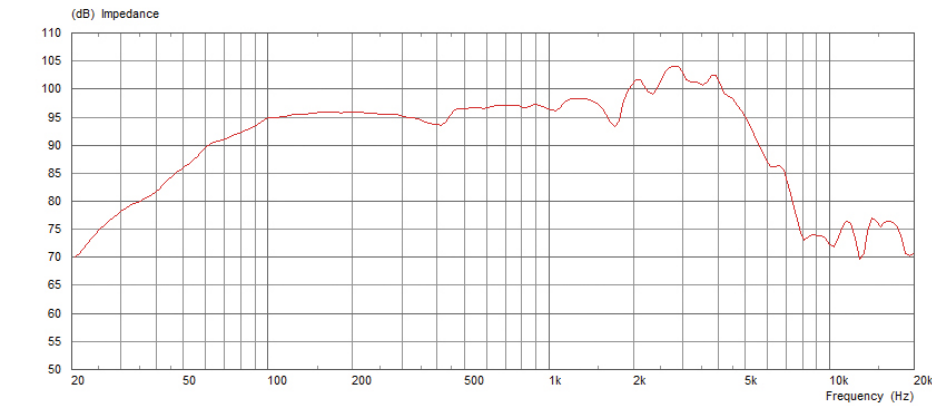

General Specifications

| | |
|------------------------|---------------------------|
| Nominal Diameter | 254mm / 10in |
| Power Rating | 50W |
| Rated impedance | 8 Ω or 16 Ω |
| Sensitivity | 95dB |
| Chassis type | Pressed steel |
| Magnet type | Ceramic |
| Magnet weight | 0.56kg / 20oz |
| Voice coil diameter | 44mm / 1.75in |
| Voice coil material | Round copper |
| Frequency range | 90-5500Hz |
| Resonance frequency Fs | 90Hz |
| DC resistance, Re | 6.78 & 12.92 |

Mounting Information

| | |
|-----------------------------|------------------------|
| Cut-out diameter | 229mm / 9.0in |
| Diameter | 254mm / 10in |
| Magnet structure diameter | 115mm / 4.5in |
| Mounting hole dimensions | 6.5x11mm / 0.25x0.43in |
| Mounting hole PCD | 245mm / 9.6in |
| Number of mounting holes | 8 |
| Chassis depth (inc gasket) | 67mm / 2.64in |
| Magnet depth | 26mm / 1.02in |
| Overall depth | 93mm / 3.7in |
| Unit weight | 1.6kg / 3.5lb |